

VHi

2 Megapixel Covert IP Camera




3.7mm Lens



Key Features

- 2 Mega pixel 1/3" CMOS image sensor for discreet use.
- 3.7mm Megapixel Pinhole Lens (Horiz:66°) 2.1mm Wide angle Megapixel Board Lens (Horiz.108°).
- Supports image resolutions up to Full HD (1920 x 1080).
- WDR, HSBC, BLC, Defog, 2D/3DNR.
- Dual Streaming of H.264 and M-JPEG.
- Up to 30 frames per second at all image resolutions.
- Integrated motion detection with pre- and post-alarm image / video buffering.
- Event-triggered FTP and email upload of still images and videos.
- Full Duplex Two-Way Audio Support.
- External sensors and External alarm devices support.
- Supports CBR and CVBR modes /Controllable frame rates.
- 12VDC/ IEEE802.3af PoE.
- Conformant with ONVIF (Profile-S).

Dimensions (Unit :mm)

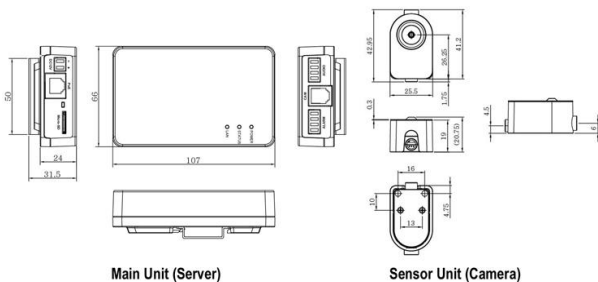

Main Unit (Server)

Sensor Unit (Camera)

Covert Network

Specifications

MODEL	VHi
System	
CPU	32-bit ARM9 RISC CPU up to 432MHz
Flash	128 Mbyte
SDRAM	128 Mbyte
Camera	
Image sensor	2.0 Megapixel 1/3" Progressive scan CMOS Image Sensor
Total Pixels	1920(H) x 1080(V) 2 Megapixel
Effective Pixels	1920(H) x 1080(V) 2 Megapixel
S/N Ratio	More than 50dB
Min. Illumination	0.2 Lux
Day & Night	Auto (AGC D/N)
Lens (not included)	3.7mm Megapixel Pinhole Lens 2.1mm Wide angle Megapixel Board Lens
Video	
Video compression	H.264 High Profile, Motion JPEG.
Resolutions	Up to 1920 x 1080 (Full HD)
Frame rate	H.264 Up to 30fps with 1920x1080 MJPEG Up to 30fps with VGA resolution
Video streaming	Support multi stream with H.264, MJPEG, Adjustable frame rate, CVBR/CBR in H.264.
Pan/Tilt/Zoom	Digital PTZ
Image setting	Day & Night Auto White Balance WDR, HSBC, BLC Defog, 2D/3DNR, Privacy Mask. 3DNR(On/Off) Effect - Color, Sharpness, Mirror/V-Flip, etc
Alarm In/Out	In: 1, Out: 1
Audio	
Audio Streaming	Two Way, full duplex
Audio Compression	G.711
Sample Rate	8KHz
Data rate	64Kbps.
Audio input	Microphone input / 1 x Line-In (Mono)
Audio output	Line output / 1 x Line-Out (Mono)
System Integration	
Security	Password Protection, User access log, HTTPS encryption
Supported protocol	HTTP, HTTPS, FTP, SMTP, UPnP, DNS, DDNS, NTP, RTSP, RTP, TCP, UDP, ICMP, DHCP
Intelligent video	Motion detection up to 1920x1080 with 4x3 blocks.
Alarm Trigger	Motion detection/ External input / Normal Open / Close Type
Alarm events	File upload via ftp, E-mail, Notification via email, FTP and TCP
Video buffer	5MB pre-alarm and 180 sec (max) post-alarm
Firmware upgrade	Remote upgrade via network
API	CGI Interface document, ActiveX Interface(ocx(dll) + document)
Physical	
Power Source	DC12V/1.5A, PoE(Power over Ethernet): 802.3af-Optional
Storage	Micro SD slot (Built-in)
Power Consumption	Max. 4.5W
Net Weight	246g (Included Cable/ Sensor module)
LED's	Power, Network Status, Network Lin
Dimension	66mm(W) x 107mm(H) x 24mm (D)
General	
Operating Temperature	-10 degree~50 degree Celsius(14F~122F)
Storage Temperature	-20 degree~60 degree Celsius(-4F~140F)

* Specifications are subject to change without prior notice.

Made in Korea