

# VR08EP

8CH Plug & Play Full HD NVR  
POE 8CH Plugs & Play Full HD NVR



## Key Features


- \* ONVIF Compatible & Auto IP Camera Detection.
- \* Intelligent Dual (Main & Sub) Stream.
- \* PoE Switching HUB Built-in (upto 4 ch supported).
- \* Local Monitoring (HDMI/ VGA).
- \* Gigabit LAN/ uPNP.
- \* PUSH Notification to iPhone / iPad & Android Phone.
- \* Remote Monitoring by Remote S/W (CMS) & Smart Phone.
- \* Plug & Play with Built-in POE.

## NETWORK VIDEO RECORDER

### Specifications

MODEL	VR08EP
<b>System</b>	
Operation System	Embedded Linux
Internal Storage	2 x SATA HDD
<b>Video &amp; Audio</b>	
Protocol	Vision Hitech; Onvif
Video In	8CH (IP camera)
No. of PoE	8CH (802.3af)
Video Out	HDMI, VGA, Composite
Display Speed	240fps
Audio In / Out	1CH / 1CH
Alarm In / Out	4CH / 1CH
<b>Recording</b>	
Recording Speed	240fps@1080p, 240fps@720p, 240fps@D1
Recording Mode	Continuous Schedule, Sensor, Motion, Pre&Post, Alarm, Emergency Recording.
<b>Playback</b>	
Speed	x1, x2, x4, x8, x16, x32
Channel	1 / 4 ch split : Main stream, 9ch split : Sub stream
Search	Calendar (Date / Time) search, Event search
Backup Device	USB, Network Backup by CMS, File Backup to FTP.
<b>Network</b>	
LAN	Gigabit Ethernet (RJ45) - Fixed IP, DHCP & DDNS.
Advanced Function	1) Live Monitoring, Playback and File Backup on Remote 2) Time Synchronization by NTP Server ("pool.ntg.org") 3) Remote & E-Mail Notification, Remote System Reboot by IE, Remote PTZ Control.
Management	CMS & MMS (Smarteagle), Web (IE)
<b>General</b>	
System Recovery	Auto-Reboot and Journaling File System.
Advanced Function.	1) Import & Event of Setting Value, Water-Mark, AVI Backup 2) HDD SMART Info 3) Warning Alarm for System Over-Temperature 4) Digital Zoom for both Live & VOD mode.
Power	48V x 3.3A D/C
Operating Temperature	5°C ~ 40°C / 20~90% RH
Dimension (W x D x H)	360 x 280 x 66 (mm), 1U
Certification	CE & FCC

## Wire Diagram

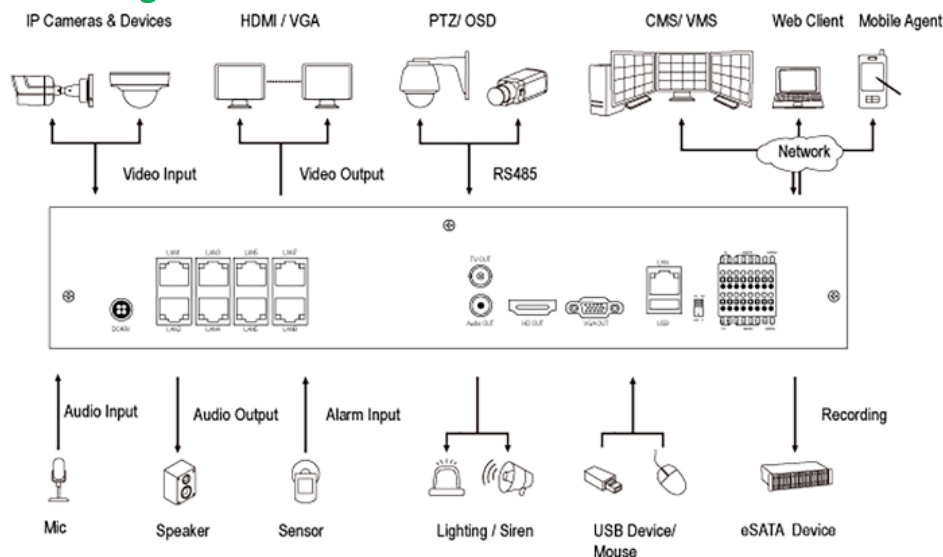

Made in Korea