


VNN71164XR

3 Megapixel Night Vision Bullet IP Camera

Improved High Power LED's


Compact slim design with quick & easy installation

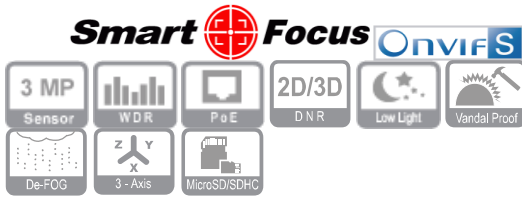

Key Features

- 3 Mega pixel 1/2.8" SONY progressive scan CMOS image sensor for excellent image quality
- 5~60mm Motorized Zoom Lens
- 70M IR Beam Distance (Built-in High Power LED's)
- Triple Stream
- Supports image resolution up to 3MP
- 2065(H)x 1553(V) 3MP Max. 30fps
- Supports VBR/CBR in H.264
- Controllable frame rate
- Supports WDR, Defog, 2D+3DNR, Smart IR
- Digital PTZ
- Corridor view in H.264
- Tool-Free 3-Axis
- 12VDC/ IEEE802.3af POE
- Conformant with ONVIF (Profile-S)
- Includes Windows based IP Installer and license-free 16 channel NVR(Network Video Recorder) software

Dimensions (Unit :mm)

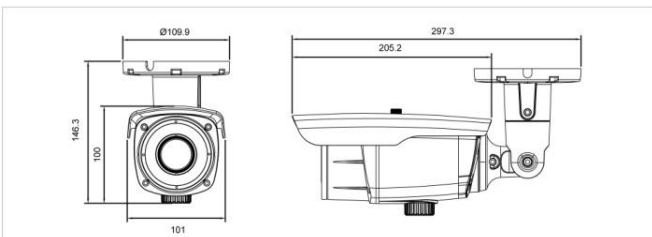

IP Night Vision – Bullet camera

Specifications

MODEL	VNN71164XR
System	
CPU	ARM1176JZF-S (400 MHz, Instruction cache: 32kbyte, data cache
Flash	2Gbit Flash memory
SDRAM	2Gbit DDR3
Camera	
Image sensor	3.15 Mega 1/2.8" SONY progressive scan CMOS
Total Pixels	2065(H) x 1565(V) 3.23 Megapixel
Effective Pixels	2065(H) x 1553(V) 3.20 Megapixel
S/N Ratio	More than 50dB
Min. Illumination	0 Lux (IR On)
IR Distance	70M (4 Built-in Power LED's)
Day & Night	ICR
Lens	5~60mm Motorized Zoom Lens (Optical Zoom 12x)
Video	
Video compression	H.264 High Profile@4.0, MJPEG–Image quality: 3 Steps
Resolutions	Up to 2048 x 1536 3MP
Frame rate	Triple Stream 1 st stream: 30fps@2048x1536 2 nd stream: 30fps@640x480 3 rd stream: 30fps@640x480
Video streaming	Triple stream with H.264/MJPEG, Adjustable frame rate, CBR/VBR in H.264
Pan/Tilt/Zoom	Digital PTZ
Corridor view	Corridor view in H.264 (190degree/ 270degree)
Image setting	Brightness, contrast, Sharpness Day & Night Auto White Balance Auto Exposure Privacy Mask DSS, Effect - Color, Mirror/V-Flip, etc.
Audio / Alarm	
Audio Streaming	Two Way
Audio Compression	G.711
Sample Rate	8KHz
Alarm In/Out	In: 1, Out: 1
System Integration	
Security	Password Protection, User access log, HTTPS encryption
Supported protocol	HTTP, HTTPS, FTP, SMTP, UPnP, DNS, DDNS, NTP, RTSP, RTP, TCP, UDP, ICMP, DHCP
Intelligent video	Object based Motion detection up with 12x 12 block Tamper detection with Global scene change and defocus.
Alarm events	File upload via ftp, E-mail, Notification via email,SD Card.
Video buffer	5MB pre-alarm and 180 sec (max) post-alarm
Firmware upgrade	Remote upgrade via network
API	CGI Interface document, ActiveX Interface(ocx(dll) + document)
Physical	
Power Source	DC12V/1.5A, PoE(Power over Ethernet): 802.3af-Optional
Storage	Micro SD Slot (Built-in)
Power Consumption	Max. 11W with IR
Net Weight	1,500g
LED's	Power, Network Connection
Dimension	109.9mm(W) x 146.3mm(H) x 297mm(D) incl. Bracket
General	
Operating Temperature	-10 degree~50 degree Celsius(14F~122F)
Storage Temperature	-20 degree~60 degree Celsius(-4F~140F)
Software	
Included Software	NVR C/S (16 Channel), IP Installer (Windows only)

* Specifications are subject to change without prior notice.

Made in Korea