

# VNV50151X

## 2 Megapixel Slim Vandal-proof Dome IP Camera

**Best Fit for Vehicle surveillance**

**Best Fit to your Interior**


Compact slim design with quick & easy installation



### Key Features

- 2 Mega pixel 1/2.9" SONY progressive scan CMOS image sensor for excellent image quality
- 3.0mm Wide angle Megapixel Board Lens( Option: 2.8mm)
- Triple Stream
- Supports image resolution up to 2MP
- 1920(H)x 1080(V) 2MP Max. 30fps
- Supports VBR/CBR in H.264
- Controllable frame rate
- Supports WDR, Defog, 2D+3DNR, Smart IR
- Digital PTZ
- Corridor view in H.264
- Tool-Free 3-Axis
- 12VDC/ IEEE802.3af POE
- Conformant with ONVIF (Profile-S)
- Includes Windows based IP Installer and license-free 16 channel NVR(Network Video Recorder) software

### Dimensions (Unit :mm)

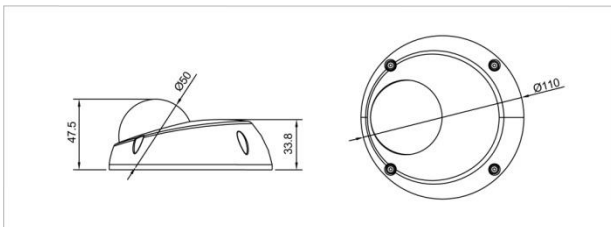

## IP Slim Vandal-proof Dome

### Specifications

MODEL	VNV50151X
<b>System</b>	
CPU	ARM1176JZF-S (400 MHz, Instruction cache: 32kbyte, data cache)
Flash	2Gbit Flash memory
SDRAM	2Gbit DDR3
<b>Camera</b>	
Image sensor	2.0 Mega 1/2.9" SONY progressive scan CMOS
Total Pixels	1952(H) x 1116(V) 2.18 Megapixel
Effective Pixels	1944(H) x 1104(V) 2.14 Megapixel
S/N Ratio	More than 50dB
Min. Illumination	0.1Lux
IR Distance	N/A
Lens	3.0mm Wide angle Megapixel Board Lens (Option: 2.8mm)
<b>Video</b>	
Video compression	H.264 High Profile@4.0, MJPEG-Image quality: 3 Steps
Resolutions	Up to 1920 x 1080 2MP
Frame rate	Triple Stream 1 <sup>st</sup> stream: 30fps@1920x1080 2 <sup>nd</sup> stream: 30fps@1280x720 3 <sup>rd</sup> stream: 30fps@640x480
Video streaming	Triple stream with H.264/MJPEG, Adjustable frame rate, CBR/VBR in H.264
Pan/Tilt/Zoom	Digital PTZ
Corridor view	Corridor view in H.264 (190degree/ 270degree)
Image setting	Brightness, contrast, Sharpness Day & Night Auto White Balance Auto Exposure Privacy Mask DSS, Effect - Color, Mirror/V-Flip, etc.
<b>System Integration</b>	
Security	Password Protection, User access log, HTTPS encryption
Supported protocol	HTTP, HTTPS, FTP, SMTP, UPnP, DNS, DDNS, NTP, RTSP, RTP, TCP, UDP, ICMP, DHCP
Intelligent video	Object based Motion detection up with 12x 12 block Tamper detection with Global scene change and defocus.
Alarm events	File upload via ftp, E-mail, Notification via email, SD Card.
Video buffer	5MB pre-alarm and 180 sec (max) post-alarm
Firmware upgrade	Remote upgrade via network
API	CGI Interface document, ActiveX Interface(ocx(dll) + document)
<b>Physical</b>	
Power Source	DC12V/1.5A, PoE(Power over Ethernet): 802.3af-Optional
Power Consumption	Max. 3.5W
Net Weight	352g
LED's	Power, Network Connection
Dimension	110mm(Dia.) x 47.5mm
<b>General</b>	
Operating Temperature	-10 degree~50 degree Celsius(14F~122F)
Storage Temperature	-20 degree~60 degree Celsius(-4F~140F)
<b>Software</b>	
Included Software	NVR C/S (16 Channel), IP Installer (Windows only)

\* Specifications are subject to change without prior notice.

Made in Korea